

NONPROVISIONAL PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Attorney Docket No.: 106967

Date: October 23, 2000

BOX PATENT APPLICATION

**NONPROVISIONAL APPLICATION TRANSMITTAL
RULE §1.53(b)**

Director of the U.S. Patent and Trademark Office
Washington, D.C. 20231

Sir:

Transmitted herewith for filing under 37 C.F.R. §1.53(b) is the nonprovisional patent application

For (Title): CONTROL APPARATUS FOR TRANSMISSION-EQUIPPED HYBRID VEHICLE, AND
CONTROL METHOD FOR THE SAME

By (Inventors): Toshifumi TAKAOKA, Naoto SUZUKI, Takashi SUZUKI, Daimon OKADA

- ☒ Formal drawings (Figs. 1-7; 6 sheets) are attached.
- ☒ A Declaration and Power of Attorney is filed herewith.
- ☒ An assignment of the invention to TOYOTA JIDOSHA KABUSHIKI KAISHA is filed herewith.
- ☒ An Information Disclosure Statement is filed herewith.
- ☐ Entitlement to small entity status is hereby asserted.
- ☐ A Preliminary Amendment is filed herewith.
- ☐ Please amend the specification by inserting before the first line the sentence --This nonprovisional application claims the benefit of U.S. Provisional Application No. _____, filed _____--
- ☒ Priority of foreign application No. JP HEI 11-329078 filed November 19, 1999 in Japan is claimed (35 U.S.C. §119).
- ☒ A certified copy of the above corresponding foreign application is filed herewith.
- ☒ The filing fee is calculated below:

**CLAIMS IN THE APPLICATION AFTER ENTRY OF
ANY PRELIMINARY AMENDMENT NOTED ABOVE**

FOR:	NO. FILED	NO. EXTRA
BASIC FEE		
TOTAL CLAIMS	23 - 20	= 3*
INDEP CLAIMS	6 - 3	= 3*
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS PRESENTED		

* If the difference is less than zero, enter "0".

SMALL ENTITY

RATE	FEE
	\$ 355
x 9 =	\$
x 40 =	\$
+ 135 =	\$
TOTAL	\$

OR
OR
OR
OR
OR
OR

**OTHER THAN A
SMALL ENTITY**

RATE	FEE
	\$ 710
x 18	\$ 54
x 80	\$ 240
+ 270	\$ -----
TOTAL	\$1,004

- ☒ Check No. 113014 in the amount of \$1,004.00 to cover the filing fee is attached. Except as otherwise noted herein, the Director is hereby authorized to charge any other fees that may be required to complete this filing, or to credit any overpayment, to Deposit Account No. 15-0461. Two duplicate copies of this sheet are attached.

Respectfully submitted,



James A. Oliff
Registration No. 27,075

Mario A. Costantino
Registration No. 33,565

JAO:MAC/cmm

Inventor Information

Inventor One Given Name:: Toshifumi
Family Name:: TAKAOKA
Name Suffix::
City of Residence:: Susono-shi
State or Prov. of Residence:: Shizuoka-ken
Country of Residence:: Japan
Inventor Two Given Name:: Naoto
Family Name:: SUZUKI
Name Suffix::
City of Residence:: Fuji-shi
State or Prov. of Residence:: Shizuoka-ken
Country of Residence:: Japan
Inventor Three Given Name:: Takashi
Family Name:: SUZUKI
Name Suffix::
City of Residence:: Susono-shi
State or Prov. of Residence:: Shizuoka-ken
Country of Residence:: Japan
Inventor Four Given Name:: Daimon
Family Name:: OKADA
Name Suffix::
City of Residence:: Ikeda-shi
State or Prov. of Residence:: Osaka-hu
Country of Residence:: Japan
Inventor Five Given Name ::
Family Name::
Name Suffix::
City of Residence::
State or Prov. of Residence::
Country of Residence::

Correspondence Information

Name Line One:: Oliff & Berridge PLC
Address Line One:: P.O. Box 19928
City:: Alexandria
State or Province:: VA
Postal or Zip Code:: 22320
Telephone:: (703) 836-6400
Fax:: (703) 836-2787
Electronic Mail:: commcenter@oliff.com

Application Information

Title Line One:: CONTROL APPARATUS FOR TRANSMISSION-
Title Line Two:: EQUIPPED HYBRID VEHICLE, AND
Title Line Three:: CONTROL METHOD FOR THE SAME
Title Line Four::

Total Drawing Sheets:: 6
Docket Number:: 106967

Continuity Information

>This application is a::
Application One::
Filing Date::
Patent Number::
which is a::
>>Application Two::
Filing Date::
Patent Number::

Prior Foreign Applications

Foreign Application One:: JP HEI 11-329078
Filing Date:: November 19, 1999
Country:: Japan
Priority Claimed:: yes
Foreign Application Two::
Filing Date::
Country::
Priority Claimed::
Foreign Application Three::
Filing Date::
Country::
Priority Claimed::

CONTROL APPARATUS FOR TRANSMISSION-EQUIPPED HYBRID VEHICLE,
AND CONTROL METHOD FOR THE SAME

INCORPORATION BY REFERENCE

5 The disclosure of Japanese Patent Application No. 11-329078 filed on November 19, 1999, including the specification, drawings and abstract is incorporated herein by reference in its entirety.

10 BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to a control apparatus and a control method for a transmission-equipped hybrid vehicle having an engine, an electric motor, and a transmission.

15 More particularly, the invention relates to a control apparatus and a control method that improve fuel efficiency, emission characteristics, dynamics, etc.

2. Description of Related Art

A hybrid vehicle has an engine and an electric motor
20 as drive power sources. The electric motor is preferably used not only to produce vehicle-driving torque but also as an electric power generator. In this respect, the electric motor is often termed motor-generator. The hybrid vehicle is able to improve fuel economy and the like by efficiently
25 operating the engine and the electric motor.

A mechanical distribution type hybrid vehicle in which an engine and two electric motors are connected to a

planetary gear unit has now been commercialized. This type of hybrid vehicle does not have a transmission. In contrast, a hybrid vehicle in which an engine, an electric motor, and a transmission are connected has also been proposed, as disclosed in, for example, Japanese Laid-Open Patent Application No. 8-168104. Systems equipped with continuous transmissions instead of stepwise transmissions (a type of transmission that selects one of a plurality of gear speeds) have also been proposed.

In the aforementioned mechanical distribution type hybrid apparatus, optimization in terms of fuel economy and the like is pursued by controlling the operation states of the engine and the electric motors. However, this type of hybrid apparatus does not have a transmission for selecting from gear speeds.

With regard to a vehicle that is not a hybrid vehicle, speed change characteristics of the automatic transmission are set so as to correspond to the vehicle speed and the amount of accelerator operation. Based on the speed change characteristics, a gear speed of the transmission is determined. A generally termed MMT (multi-mode manual transmission, that is, a transmission system where a clutch pedal is removed and clutch connecting/disconnecting operations are automatically performed by an actuator) also uses the speed change characteristics of the automatic transmission in a similar fashion to determine a gear speed.

00541027-102300

A transmission-equipped hybrid vehicle as mentioned above can be constructed by adding to a system in which an engine and a transmission are connected as mentioned above, an electric motor that produces torque to add to the drive power of the engine. However, if the speed change characteristics of an automatic transmission intended only for use with a conventional engine are immediately applied to the transmission-equipped hybrid vehicle although the electric motor is added to the hybrid vehicle, it is impossible to select a gear speed that allows most efficient operation, and it is difficult to perform appropriate controls regarding efficiency, emissions, vehicle dynamics, etc.

SUMMARY OF THE INVENTION

Accordingly, it is one object of the invention to provide a control apparatus and a control method capable of appropriately controlling a hybrid vehicle having a transmission in terms of efficiency, emission characteristics, vehicle dynamics, etc.

To achieve the aforementioned and/or other objects, a control apparatus for a hybrid vehicle in accordance with a first aspect of the invention is for a hybrid vehicle having an engine and a motor as drive power sources and having, between the engine and a drive wheel, a transmission capable of changing drive power transmission by selection from a plurality of gear speeds. In the

control apparatus, the priority sequence in a control of
adjusting the drive power with respect to a vehicle drive
power request is set in the sequence of an engine output
increase, a motor output increase, and a gear speed change
5 in a gear ratio increasing direction.

For example, the control apparatus of this aspect of
the invention: (1) selects a gear speed of a least gear
ratio within such a range that an engine revolution speed
higher than or equal to a predetermined lower limit
10 revolution speed is attainable; (2) achieves a requested
drive power by an engine output with the gear speed
selected; (3) achieves the requested drive power by the
engine output and a motor output when the requested drive
power is not achievable singly by the engine output; and
15 (4) changes the gear speed in a gear ratio increasing
direction when the requested drive power is not achievable
by the engine output and the motor output.

In accordance with this aspect of the invention, the
requested drive power is achieved by adjusting the engine
20 output, the motor output, and the gear speed in that order.
The gear speed change is assigned with a lower priority,
and the engine output change is assigned with a higher
priority. Therefore, when a drive power request is output,
a control is performed so as to set the gear speed to a
25 lower speed and increase the engine output. As a result,
the engine is efficiently operated in a low-speed and high-
load state, so that fuel economy improves. Furthermore, by

setting the aforementioned priority sequence, the number of gear shifts is reduced. Therefore, frequent downshifts are avoided, and drivability improves, and an emission characteristic improves.

5 The control apparatus of this aspect of the invention may change the gear speed in accordance with a factor that affects a motor control. The factor that affects the motor control is, for example, SOC (state of charge of a battery), battery temperature, inverter temperature, etc.

10 This aspect of the invention is able to secure a stable output supplying capability of the motor, and is able to prevent deteriorations in vehicle dynamics.

Another aspect of the invention provides a control apparatus for a hybrid vehicle having an engine and a motor
15 as drive power sources and having, between the engine and the drive wheel, a transmission capable of changing drive power transmission by selection from a plurality of gear speeds. A gear speed of the transmission and an operation state of the engine are set such that the engine is
20 operated in a predetermined high-efficiency operation state, and a difference between the vehicle drive power requested and an engine output is compensated by one of a drive operation of the motor and a regenerative operation of the motor. A gear speed of a least gear ratio in the
25 transmission may be set within a range such that the engine is operated in the predetermined high-efficiency operation state, and such that the difference between the vehicle

drive power requested and the engine output is compensated by one of the drive operation of the motor and the regenerative operation of the motor.

In accordance with this aspect of the invention,
5 selecting an appropriate gear speed causes a high-efficiency operation of the engine, thereby improving fuel economy. The engine may be operated at a maximum efficiency point. Furthermore, by selecting a gear speed of a less gear ratio, improvements can be achieved in fuel
10 economy, emissions, and drivability, as mentioned above.

The predetermined high-efficiency operation state may be a state where a multiplication product of an efficiency of the engine and a transmission efficiency of the transmission maximizes. Therefore, a gear ratio and an
15 engine operation state are set so as to allow a maximum-efficiency operation of the engine and the transmission system as well, so that fuel economy can be improved.

Furthermore, the gear speed of the transmission and the operation state of the engine may be set such that the
20 engine is operated in a predetermined good emission region. Therefore, an improvement can be achieved in emissions.

Still another aspect of the invention provides a control apparatus for a hybrid vehicle having an engine and a motor as vehicle drive power sources and having, between
25 the engine and a drive wheel, a transmission capable of changing drive power transmission by selection from a plurality of gear speeds. When the drive power requested

for the vehicle is negative, a gear speed of the transmission is set such that an efficiency of regenerative braking performed by the motor maximizes.

In a hybrid vehicle equipped with a transmission, the efficiency of the motor regenerative braking changes in accordance with the gear speed of the transmission. For example, when the engine is turned following the motor (i.e., when the engine is turned by the motor), selection of a less gear ratio reduces the turning resistance on the side of the engine, and therefore increases the regenerative braking efficiency on the side of the motor. Taking this fact into consideration, the apparatus of this aspect of the invention selects a gear speed such that the efficiency of regenerative braking maximizes. Therefore, improvements can be achieved in fuel economy and emissions.

The gear speed selected may vary in accordance with whether an operation of the engine is stopped or not during a regenerative operation of the motor. This aspect is intended for a construction in which the engine operation can be stopped by a clutch or the like. When the engine is turning, the turning resistance on the side of the engine decreases and the regenerative braking efficiency on the side of the motor increases with decreases in the gear ratio as stated above. When the engine is not turning, the turning resistance on the side of the engine does not need to be taken into consideration, so that a gear speed such that the efficiency on the side of the motor increases is

selected. Thus, by selecting different gear speeds in accordance with whether the engine is turning or not, further improvements can be achieved in fuel economy and emissions.

5 The aspects of the invention are not limited to a control apparatus for a hybrid vehicle as described above. A further aspect of the invention is, for example, a hybrid vehicle or a hybrid system, and a control method for the hybrid vehicle and the hybrid system.

10 BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and/or further objects, features and advantages of the invention will become apparent from the following description of preferred embodiments with
15 reference to the accompanying drawings, in which like numerals are used to represent like elements and wherein:

FIG. 1 is a block diagram illustrating an overall construction of a hybrid vehicle in accordance with an embodiment of the invention;

20 FIG. 2 is a flowchart illustrating a control process executed by a hybrid ECU shown in FIG. 1;

FIG. 3 is a flowchart illustrating a second embodiment of the control process executed by the hybrid ECU shown in FIG. 1;

25 FIG. 4 is a diagram indicating a control process of a hybrid vehicle in accordance with another embodiment of the invention;

FIG. 5 is a diagram indicating a modification of the control process illustrated in FIG. 4;

FIG. 6 is a diagram of a hybrid vehicle for illustrating a control process executed when the requested drive power for the vehicle is negative; and

FIG. 7 is a diagram of a hybrid vehicle for illustrating still another example of the control process executed when the requested drive power with respect to the vehicle is negative.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Preferred embodiments of carrying out the invention will be described hereinafter with reference to the accompanying drawings.

FIG. 1 is a block diagram of a construction of a direct-coupled hybrid vehicle equipped with a transmission. A hybrid vehicle 1 has an engine 3 and a motor-generator 5 as drive power sources. The engine 3 and the motor-generator 5 are interconnected. The motor-generator 5 is connected to an automatic transmission 7. The automatic transmission 7 is connected to drive wheels (not shown). The motor-generator 5, when functioning as an electric motor, receives electric power from a battery 9 to produce drive power. When functioning as an electric power generator, the motor-generator 5 is turned by output from the engine to generate electric power, and sends the generated power to the battery 9.

Within the scope of the invention, the motor-generator 5 is not restricted by the layout shown in FIG. 1. For example, the motor-generator 5 may be provided at a drive wheel-side of the automatic transmission 7.

Furthermore, the motor-generator 5 may be connected to an engine output shaft or the like, or to an input/output shaft of the transmission or the like, via a clutch.

Still further, a generally termed MMT (multi-mode manual transmission) may be disposed in place of the automatic transmission 7. Unlike a conventional manual transmission, the MMT does not employ a clutch pedal but has an actuator for automatically performing clutch operations for a driving person. Based on mode settings, the MMT automatically determines a gear speed through the use of a control apparatus, as is the case with an automatic transmission. Thus, the invention is applicable not only to automatic transmissions but also to any other transmission in a similar fashion as long as the transmission is capable of selecting a gear speed from a plurality of gear speeds.

The engine 3, the motor-generator 5 and the automatic transmission 7 are controlled by a hybrid ECU 11. The hybrid ECU 11 may be formed by either a single computer or a plurality of computers. For example, an engine control portion 13, a motor-generator control portion 15, and an automatic transmission control portion 17 may be formed by three separate ECUs.

The hybrid ECU 11 receives input of an amount of accelerator operation performed by a driving person from an accelerator sensor 21, input of vehicle speed from a vehicle speed sensor 23, input of engine revolution speed from an engine revolution speed sensor 27, and input of a detection signal indicating a state of charge of the battery from a battery sensor 25. Using such input information, the hybrid ECU 11 appropriately operates the engine 3, the motor-generator 5, and the automatic transmission 7 based on the running state of the vehicle, the operation performed by the driving person, and the state of charge of the battery.

Let it be assumed herein that the system shown in FIG. 1 is not provided with a motor-generator. In this case, controls may be performed as in a conventional automatic transmission-equipped vehicle that is not a hybrid vehicle. That is, a speed change map set in accordance with the vehicle speed and the amount of accelerator operation is pre-stored. In accordance with the speed change map, a gear speed is determined, and the transmission is controlled.

In this embodiment, a motor-generator as a torque assist device is added. Therefore, if the automatic transmission is controlled through the use of a conventional speed change map, high-efficiency operation of the hybrid vehicle cannot be performed. For example, let it be assumed that the driving person suddenly depresses an

accelerator pedal so that a considerable increase in the vehicle drive power is requested. In this case, it is conceivable to increase the motor output or perform a downshift of gears in the construction shown in FIG. 1. In this invention, a drive power control is performed by adjusting and controlling the engine 3, the motor-generator 5, and the automatic transmission 7 corresponding to the requested drive power of the vehicle. In this embodiment, a drive power control as described below is performed by the hybrid ECU 11.

Referring to FIG. 2, the hybrid ECU 11 reads a vehicle speed and an accelerator operation amount in S10, and then selects a gear speed (for a high speed) of a least gear ratio that allows at least a predetermined value of engine revolution speed in S12 and S14. The predetermined value (engine revolution speed lower limit) is set to a low value within a range in which engine torque fluctuation does not adversely affect the vehicle behavior, vibration, etc. For example, the predetermined value is set to about 1200 rpm. More specifically, it is determined in S12 whether the engine revolution speed is at least the predetermined value. If NO in S12, the gear speed is shifted to the next gear speed toward the low speed (in a gear ratio increasing direction) in S14. The process then returns to S12. If YES in S12, the process proceeds to S16. The gear speed set in S12 and S14 will be referred to as "provisionally set gear speed".

09504227-102300

If the requested drive power cannot be achieved singly by engine output, the determination in S16 becomes affirmative. Subsequently in S18, it is determined whether the requested drive power can be achieved by engine output and motor output. In this step, the engine revolution speed occurring when the provisionally set gear speed is determined, and a maximum motor torque T_{mmax} is determined. The value T_{mmax} is also a value obtained by conversion into torque that acts on the drive shaft.

10 In S18, the requested drive power is compared with $T_{emax}+T_{mmax}$. If $T_{emax}+T_{mmax}$ is greater than or equal to the requested drive power, the requested drive power can be achieved by engine output and motor output. That is, if the determination in S18 is negative, the process proceeds
15 to S22, in which a gear speed is determined. The gear speed selected in S12 and S14 is adopted without changing it. Then, the hybrid ECU 11 causes the engine 3 and the motor-generator 5 to produce the requested drive power. In this step, the hybrid ECU 11 causes the engine 3 to produce
20 the maximum torque T_{emax} , and causes the motor-generator 5 to produce a drive power that cannot be covered by the maximum torque of the engine 3, that is, a drive power equal to the shortfall from the requested drive power.

If the requested drive power cannot be achieved even
25 by the combination of engine output and motor output, the determination in S18 becomes affirmative. The process subsequently proceeds to S20, in which the gear speed is

changed to the next gear speed toward the low gear side (toward the gear ratio increasing side). That is, in S20, the provisionally set gear speed set in S12 and S14 is changed by one gear speed. Subsequently, the process
5 proceeds to step S16 to repeat similar processing.

As can be understood from the foregoing description, a priority sequence in the drive power adjusting control is determined as in the sequence of engine output, motor output, and gear speed, in this embodiment. The requested
10 drive power is achieved through adjustment in accordance with the priority sequence. More specifically, a gear speed of a smallest possible gear ratio is provisionally set. If the requested drive power can be provided by engine output with the provisionally set gear speed, engine
15 output is used. If the requested drive power is higher, torque assist by the electric motor is performed. If the requested drive power is even higher, the transmission is shifted to a lower-speed gear.

Through this control, the gear speed is set to a
20 lower speed, and the engine torque is set to a higher value. Therefore, the engine can be highly efficiently operated in a low-speed and high-load state, thereby improving fuel economy.

Furthermore, until the motor torque reaches a
25 maximum, the requested drive power is achieved through torque assist by the motor without a downshift of the gear speed. Therefore, frequent downshifts are avoided, so that

drivability can be improved. Still further, if the number of downshifts is small, the influence of sharp changes in engine revolution speed due to downshifts on emissions (problem in the AF controllability) can be reduced, so that an improvement can be achieved in emissions.

Next, a preferred control process executed by the hybrid ECU 11 in this embodiment will be described. In this process, the hybrid ECU 11 changes the transmission speed based on factors that affect the motor control and, in particular, a factor that has effect on the amount of torque assist provided by the motor-generator 5.

The factors having effect on the amount of torque assist include, for example, SOC (state of charge of a battery), battery temperature, inverter temperature, etc. It is to be noted that, depending on the values of these parameters, the torque that can be supplied from the side of the motor increases or decreases. Taking such changes in the torque, a gear speed of the transmission is set in this embodiment.

FIG. 3 illustrates a control process in accordance with this embodiment, wherein SOC is used as a factor that affects the amount of torque assist. The process illustrated in FIG. 3 includes the control process illustrated in FIG. 2, and also S19 following S18. In S19, the SOC of the battery is determined. The SOC is expressed by, for example, the ratio of the amount of electricity stored at the time of performance of this control process

to the amount of electricity stored in a full storage state. The SOC is determined by using battery voltage and current and, preferably, by also using battery temperature as needed. It is also possible to input an SOC determined by a separate battery ECU or the like into the hybrid ECU.

In S19, the SOC at the time of performance of this control process is compared with a preset value. If the SOC is at most the preset value (i.e., if the SOC is equal to or less than the preset value), the process proceeds to S20, in which the gear speed is changed to the next speed toward the low speed side. If it is determined in S19 that the SOC is greater than the preset value, the process proceeds to S22, in which the gear speed is determined.

Thus, this embodiment sets a gear speed based on a factor that has effect on the amount of torque assist or the torque assist capability of the motor-generator 5. Therefore, it becomes possible to secure a stable assist torque supplying capability and prevent a reduction in vehicle dynamics caused by an insufficient torque. Furthermore, it becomes possible to prevent deterioration of the battery or the like.

Another embodiment of the invention will next be described. In this embodiment, the constructions of a hybrid vehicle and its control apparatus may be substantially the same as those in the first embodiment. In the second embodiment, the control process executed by the hybrid ECU 11 is improved, so that efficiency and fuel

economy can be further improved.

In this embodiment, the hybrid ECU 11 selects a gear speed of a least gear ratio (a higher gear speed) within such a range that the requested drive power can be achieved by engine output and motor output while the present vehicle speed is maintained. Then, with the selected gear speed, the engine is operated in a predetermined high-efficiency operating state. The difference between the engine output and the requested drive power is compensated by drive power assist based on an electric power consuming movement (driving) of the motor, or, in the case of a surplus of power (from the engine), is regenerated into an electric power by electric power regenerating operation of the motor.

FIG. 4 is a diagram indicating a specific example of the control process in this embodiment, in which the horizontal axis indicates axle rotation speed N_p and the vertical axis indicates axle torque T_p . In the diagram, a requested drive power region AL achievable by a low gear and a requested drive power region AH achievable by a high gear are indicated.

In the region AL, a central line L indicates engine torque (converted into axle torque; the same applies in the following description) produced when the engine is operated at a maximum efficiency with the low gear being set. A region upper limit line LU is located higher than the line L by a maximum value of motor drive torque. A region lower

limit line LB is located lower than the line L by a maximum value of motor regenerative torque. In this embodiment, the region AL is defined as a range such that the requested drive power can be achieved with the low gear. In the high gear-achievable requested drive power region AH, a central line H indicates engine torques produced when the engine is operated at a maximum efficiency with the high gear being set. A region upper limit line HU is located higher than the line H by a maximum value of motor drive torque. A region lower limit line HB is located lower than the line H by a maximum value of motor regenerative torque. It should be noted herein that the region AH of the high gear and the region AL of the low gear have different shapes and positions corresponding to their different gear ratios.

In the example indicated in FIG. 4, the hybrid ECU 11 controls the transmission, the engine, and the motor as follows. That is, as described above, the hybrid ECU 11 selects a gear speed of a least gear ratio within the range such that the requested drive power can be achieved by engine output (maximum-efficiency operation) and motor output at the present vehicle speed.

For example, let it be assumed that the combination of the requested drive power and the axle rotation speed (vehicle speed) is at a point Pa in FIG. 4. In this case, the point Pa is contained only in the high gear-achievable requested drive power range AH. Therefore, the high gear is selected.

Furthermore, let it be assumed that the combination of the requested drive power and the axle rotation speed is at a point P_c in FIG. 4. In this case, the point P_c belongs to both the region AL and the region AH, so that either gear can be selected. The hybrid ECU 11 selects the gear speed of the less gear ratio, that is, the high gear.

The aforementioned gear speed selecting process can be expressed by using expression (1):

$$\begin{aligned} T_{\text{max}}(i, v) - T_{\text{m regenerative max}}(i, v) \\ \leq \text{requested drive power} \\ \leq T_{\text{max}}(i, v) + T_{\text{m drive max}}(i, v) \end{aligned} \quad (1)$$

$T_{\text{max}}(i, v)$ is a torque (converted into an axle torque; the same applies hereinafter) produced during the maximum-efficiency operating state of the engine at the gear speed i and the vehicle speed v . $T_{\text{m regenerative max}}(i, v)$ and $T_{\text{m drive max}}(i, v)$ are a maximum value of regenerative torque and a maximum value of drive torque at the gear speed i and the vehicle speed v (however, if the motor is provided at the wheel side of the transmission, the motor torque is not affected by the gear ratio). In this embodiment, a gear speed i of a least gear ratio that satisfies expression (1) is selected.

The flow of the gear selecting process may be substantially the same as the flow illustrated in FIG. 2. That is, based on the vehicle speed, a gear speed of a least gear ratio that provides an engine revolution speed that is higher than or equal to a predetermined lower-limit

revolution speed is provisionally set. If expression (1) is satisfied at the provisionally set gear speed, the gear speed is immediately adopted. If the expression is not satisfied, the gear speed is changed to the next gear speed toward the low speed side. This process is continued until expression (1) is satisfied. As a result, a highest gear speed that allows for the requested drive power is selected.

Although in the example indicated in FIG. 4, the number of gear speeds is two, a similar gear selecting process is applicable to a transmission having more than two gear speeds.

An engine control and a motor control at the selected gear speed will next be described. In this embodiment, the engine is operated in a high-efficiency operating state, and the difference between the engine output and the requested drive power is compensated by the drive operation of the motor or the regenerative operation of the motor as mentioned above.

For a specific description, let it be assumed that the combination of the requested drive power and the axle rotation speed is at a point Pa in the example of FIG. 4. In this case, the engine is operated at a point Pb on the line H. The line H indicates torques output during the maximum-efficiency operating state of the engine with the high gear, as mentioned above. Since the engine output is greater than the requested drive power, the difference

therebetween is absorbed by the regenerative operation of the motor. The electric power obtained by the regeneration is stored into the battery.

Furthermore, let it be assumed that the combination of the requested drive power and the axle rotation speed is at a point P_c in FIG. 4. In this case, the engine is operated at a point P_d on the line H. Since the engine output is less than the requested drive power, the shortfall from the requested drive power is compensated by the drive operation of the motor. In this case, electric power is extracted from the battery.

As is apparent from the foregoing description, this embodiment selects an engine operation region and a gear speed so as to maximize the engine efficiency with the aid of the regenerative operation of the motor-generator or the drive operation of the motor-generator. Therefore, the embodiment is able to operate the engine at high efficiency and improve fuel economy.

A modification of the foregoing embodiment will be described. In the foregoing embodiment, an engine operation region and a gear speed are selected such that the engine is operated at a maximum efficiency. In this modification, an engine operation region and a gear speed are selected such that the multiplication product of the engine efficiency and the transmission rate of the transmission apparatus maximizes.

In the example indicated in FIG. 4, the line H

000001-102300
prescribes the output torque during the maximum-efficiency
operating state of the engine. Instead of the line H, a
line where the "engine efficiency \times transmission rate of
the transmission apparatus" maximizes is used in this
5 modification. The transmission rate of the transmission
apparatus is determined in accordance with the gear speed
and the axle rotation speed.

This embodiment is able to achieve maximum-efficiency
operation of not only the engine but also the transmission
10 system, and therefore allow a further improvement in fuel
economy.

Another modification of the embodiment will be
described. In this modification, an engine operation
region and a gear speed are selected such that the emission
15 characteristic is optimized. That is, taking it into
consideration that emissions vary depending on the engine
operation region, an operation region is selected such that
the emission characteristic becomes good.

In a specific example indicated in FIG. 5, the engine
20 of the hybrid vehicle is assumed to be a diesel engine. As
indicated in FIG. 5, in a low-speed and high-load region of
a diesel engine, there is a region where the emission
characteristic is bad in extracting a portion of exhaust
gas from the exhaust system of the engine and returning the
25 portion of exhaust gas to the intake system. Therefore,
this region is avoided in selecting an engine operation
region and a gear speed.

For example, let it be assumed that the combination of the axle rotation speed and the requested drive power is at a point P_e in FIG. 5. If the engine is operated at a maximum-efficiency point (P_f on the line H), the operation point enters the emission deterioration region. To avoid this, a point P_g indicated in the diagram is selected as an operation region. In this case, the engine output is insufficient for the requested drive power, so that the amount of shortfall is compensated by motor output (drive).

As is apparent from the foregoing description, this embodiment sets a gear speed of the transmission and an operation region of the engine so as to avoid the emission deterioration region, that is, so that the engine is operated in a good emission region. Therefore, the emission characteristic can be improved.

While controls performed in a case where the requested drive power is mainly positive have been described above, a preferable control in a case where the requested drive power is negative will be described below.

When the requested drive power is negative, regenerative braking is basically performed by the motor-generator, and the obtained electric power is stored into the battery. The invention is intended for a transmission-equipped hybrid vehicle. When the requested drive power is negative, the invention sets a gear speed on the side of the transmission so that the efficiency of the regenerative braking on the side of the motor maximizes.

For example, a hybrid vehicle having a construction as illustrated in FIG. 6 will be considered. A transmission is connected to an engine. A motor-generator is connected between the transmission and wheels. The motor-generator is directly connected to an output shaft of the transmission.

In this case, the engine is turned following the motor (i.e., turned by the motor) during regenerative braking. Friction of the engine (turning resistance) becomes a factor that reduces the regenerative braking efficiency. Therefore, this control apparatus of the hybrid vehicle selects a gear speed of a least gear ratio (highest gear speed) for regenerative braking, and causes the transmission to perform a shift to the selected gear speed.

Through this control, the gear ratio is reduced, so that the friction loss caused on the motor-generator by the engine via the transmission minimizes and, therefore, the efficiency of regenerative braking increases.

Thus, when the requested drive power is negative, this embodiment selects a gear speed in the transmission that maximizes the regeneration efficiency, so that fuel economy and emission characteristic can be improved.

Next, a second example of the transmission control performed when the requested drive power is negative will be described. A hybrid vehicle designed so as to be able to stop engine revolution is assumed herein. This

embodiment selects a gear speed at which the regeneration efficiency maximizes. The optimal gear speed set varies depending on whether to stop engine operation.

This embodiment is applied to, for example, a control
5 apparatus for a hybrid vehicle as illustrated in FIG. 7. A motor-generator is disposed between an engine and a transmission. A clutch is interposed between a rotating shaft of the motor and a rotating shaft of the engine.

When the requested drive power is negative, the
10 control apparatus determines whether the engine is turning or is stopped. If the clutch is connected, the engine is operating in a fuel-cut state. Conversely, if the clutch is disconnected, the engine is stopped.

When the engine is operating, the control apparatus
15 selects a gear speed of a least gear ratio. Therefore, the amount of engine turning resistance transmitted decreases, and the efficiency of regenerative braking increases. Conversely, when the engine is stopped, a gear speed that maximizes the efficiency of the motor-generator is
20 selected. If the engine is stopped, there is no effect caused by engine turning resistance. Therefore, the aforementioned gear speed selection maximizes the efficiency of regenerative braking. The control apparatus controls the shift to the gear speed selected as described
25 above. Furthermore, the control apparatus causes the motor-generator to perform regenerative braking.

Thus, this embodiment sets a different gear speed

depending on whether to operate or stop the engine, so that the efficiency of regenerative braking can be increased in both modes. Therefore, fuel economy and emission characteristic can be improved.

As is apparent from the foregoing embodiment, the invention makes it possible to select an appropriate gear speed at which the engine and the motor can be efficiency operated in a transmission-equipped hybrid vehicle. Therefore, improvements can be achieved in efficiency, emissions, vehicle dynamics, etc.

In the illustrated embodiment, the controller (hybrid ECU 11) is implemented as a programmed general purpose computer. It will be appreciated by those skilled in the art that the controller can be implemented using a single special purpose integrated circuit (e.g., ASIC) having a main or central processor section for overall, system-level control, and separate sections dedicated to performing various different specific computations, functions and other processes under control of the central processor section. The controller also can be a plurality of separate dedicated or programmable integrated or other electronic circuits or devices (e.g., hardwired electronic or logic circuits such as discrete element circuits, or programmable logic devices such as PLDs, PLAs, PALs or the like). The controller can be implemented using a suitably programmed general purpose computer, e.g., a microprocessor, microcontroller or other processor device

(CPU or MPU), either alone or in conjunction with one or more peripheral (e.g., integrated circuit) data and signal processing devices. In general, any device or assembly of devices on which a finite state machine capable of
5 implementing the procedures described herein can be used as the controller. A distributed processing architecture can be used for maximum data/signal processing capability and speed.

While the invention has been described with reference
10 to preferred embodiments thereof, it is to be understood that the invention is not limited to the preferred embodiments or constructions. On the contrary, the invention is intended to cover various modifications and equivalent arrangements. In addition, while the various
15 elements of the preferred embodiments are shown in various combinations and configurations, which are exemplary, other combinations and configurations, including more, less or only a single element, are also within the spirit and scope of the invention.

WHAT IS CLAIMED IS:

1. A control apparatus for a hybrid vehicle having an engine and a motor as drive power sources, and having a transmission that is disposed between the engine and a vehicle drive wheel and that changes drive power transmission by selection from a plurality of gear speeds, the control apparatus comprising:

a controller that detects a drive power requested for the vehicle drive wheel and that adjusts the drive power by setting an engine output increase, a motor output increase, and a gear speed change in a gear ratio increasing direction, in an order of descending priorities of: (1) the motor output increase, (2) the motor output increase, and (3) the gear speed change in the gear ratio increasing direction, so as to achieve the drive power requested.

2. A control apparatus according to claim 1, wherein the controller:

(a) initially selects a gear speed of a least gear ratio within a range such that an engine revolution speed higher than or equal to a predetermined lower limit revolution speed is attainable;

(b) achieves the requested drive power singly by the engine output with the gear speed selected; otherwise

(c) achieves the requested drive power by the engine output and a motor output when the requested drive power is not achievable singly by the engine output; otherwise

(d) changes the gear speed in a gear ratio increasing direction when the requested drive power is not achievable by the engine output and the motor output.

5 3. A control apparatus according to claim 2, wherein the controller changes the gear speed in accordance with a factor that affects a motor control.

10 4. A control apparatus according to claim 3, wherein the controller changes the gear speed based on at least one of a state of charge of a battery, a battery temperature, and an inverter temperature, which are factors that affect the motor control.

15 5. A control apparatus according to claim 1, wherein the controller changes the gear speed in accordance with a factor that affects a motor control.

20 6. A control apparatus according to claim 1, wherein the controller detects the requested vehicle drive power based on a vehicle speed and an amount of operation of an accelerator.

25 7. A control apparatus for a hybrid vehicle having an engine and a motor as drive power sources, and having, between the engine and a vehicle drive wheel, a transmission that changes drive power transmission by

selection from a plurality of gear speeds, the control apparatus comprising:

a controller that detects a drive power requested for the vehicle drive wheel and that sets a gear speed of the transmission and an operation state of the engine such that the engine is operated in a predetermined high-efficiency operation state, and such that a difference between the vehicle drive power requested and an engine output is compensated by one of a drive operation of the motor and a regenerative operation of the motor.

8. A control apparatus according to claim 7, wherein the controller sets in the transmission a gear speed of a least gear ratio within a range such that the engine is operated in the predetermined high-efficiency operation state, and such that the difference between the vehicle drive power requested and the engine output is compensated by one of the drive operation of the motor and the regenerative operation of the motor.

9. A control apparatus according to claim 8, wherein the predetermined high-efficiency operation state is a state where a multiplication product of an efficiency of the engine and a transmission efficiency of the transmission maximizes.

10. A control apparatus according to claim 9, wherein the

controller sets the gear speed of the transmission and the operation state of the engine such that the engine is operated in a predetermined good emission region.

- 5 11. A control apparatus according to claim 8, wherein the controller sets the gear speed of the transmission and the operation state of the engine such that the engine is operated in a predetermined good emission region.

- 10 12. A control apparatus according to claim 7, wherein the predetermined high-efficiency operation state is a state where a multiplication product of an efficiency of the engine and a transmission efficiency of the transmission maximizes.

- 15 13. A control apparatus according to claim 12, wherein the controller sets the gear speed of the transmission and the operation state of the engine such that the engine is operated in a predetermined good emission region.

- 20 14. A control apparatus according to claim 7, wherein the controller sets the gear speed of the transmission and the operation state of the engine such that the engine is operated in a predetermined good emission region.

- 25 15. A control apparatus for a hybrid vehicle having an engine and a motor as vehicle drive power sources and

having, between the engine and a vehicle drive wheel, a transmission that changes drive power transmission by selection from a plurality of gear speeds, the control apparatus comprising:

5 a controller that detects a drive power requested for the vehicle and that sets a gear speed of the transmission such that an efficiency of regenerative braking performed by the motor maximizes when the requested drive power is negative.

10 16. A control apparatus according to claim 15, wherein when the requested drive power is negative, the controller sets a gear speed of a least gear ratio in the transmission.

15 17. A control apparatus according to claim 15, wherein the gear speed selected varies in accordance with whether or not an operation of the engine is at a stop during a regenerative operation of the motor.

20 18. A control apparatus according to claim 17, wherein the controller selects a gear speed of a least gear ratio during an operation of the engine.

25 19. A control apparatus for a hybrid vehicle according to claim 17, wherein the controller selects a gear speed such that a drive efficiency of the motor maximizes during a

stop of operation of the engine.

20. A control method for a hybrid vehicle having an engine and a motor as drive power sources, and having a transmission that is disposed between the engine and a vehicle drive wheel and that changes drive power transmission by selection from a plurality of gear speeds, the control method comprising:

detecting a drive power requested for the drive wheel; and

adjusting the drive power by setting an engine output increase, a motor output increase, and a gear speed change in a gear ratio increasing direction, in an order of descending priorities of: (1) the motor output increase, (2) the motor output increase, and (3) the gear speed change in the gear ratio increasing direction, so as to achieve the drive power requested.

21. A method according to claim 20, wherein the drive power adjusting step includes the steps of:

initially selecting a gear speed of a least gear ratio within a range such that an engine revolution speed higher than or equal to a predetermined lower limit revolution speed is attainable;

achieving a requested drive power singly by an engine output with the gear speed selected; otherwise

achieving the requested drive power by the engine

output and a motor output when the requested drive power is not achievable singly by the engine output; otherwise

changing the gear speed in a gear ratio increasing direction when the requested drive power is not achievable by the engine output and the motor output.

22. A control method for a hybrid vehicle having an engine and a motor as drive power sources, and having, between the engine and a vehicle drive wheel, a transmission that changes drive power transmission by selection from a plurality of gear speeds, the control method comprising:

detecting a drive power requested for the vehicle drive wheel; and

setting a gear speed of the transmission and an operation state of the engine such that the engine is operated in a predetermined high-efficiency operation state, and such that a difference between the vehicle drive power requested and an engine output is compensated by one of a drive operation of the motor and a regenerative operation of the motor.

23. A control method for a hybrid vehicle having an engine and a motor as vehicle drive power sources and having, between the engine and a vehicle drive wheel, a transmission that changes drive power transmission by selection from a plurality of gear speeds, the control

method comprising:

detecting a drive power requested for the vehicle;

and

setting a gear speed of the transmission such that an

- 5 efficiency of regenerative braking performed by the motor maximizes when the requested drive power is negative.

ABSTRACT OF THE DISCLOSURE

The priority sequence in a control of adjusting the drive power with respect to a vehicle drive power request is set in the sequence of: (1) an engine output increase, (2) a motor output increase, and (3) a gear speed change in a gear ratio increasing direction. More specifically, a gear speed of a least gear ratio is selected within such a range that an engine revolution speed higher than or equal to a predetermined lower limit revolution speed is attainable. A requested drive power is achieved singly by an engine output with the gear speed selected. When the requested drive power is not achievable singly by the engine output, the requested drive power is achieved by the engine output and a motor output. When the requested drive power is not achievable by the engine output and the motor output, the gear speed is changed in a gear ratio increasing direction.

FIG. 1

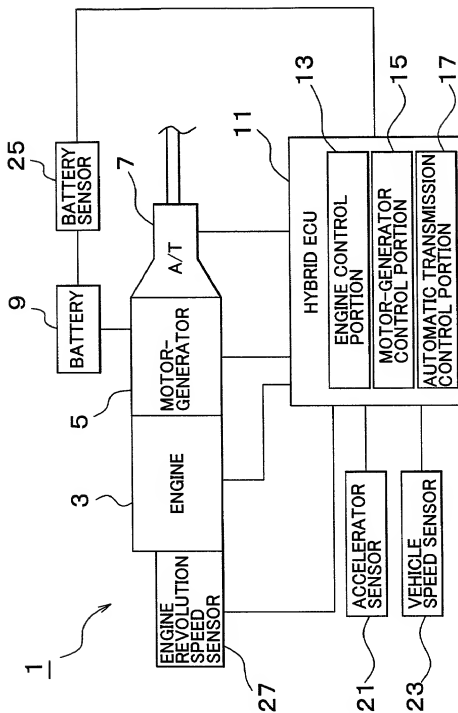


FIG. 2

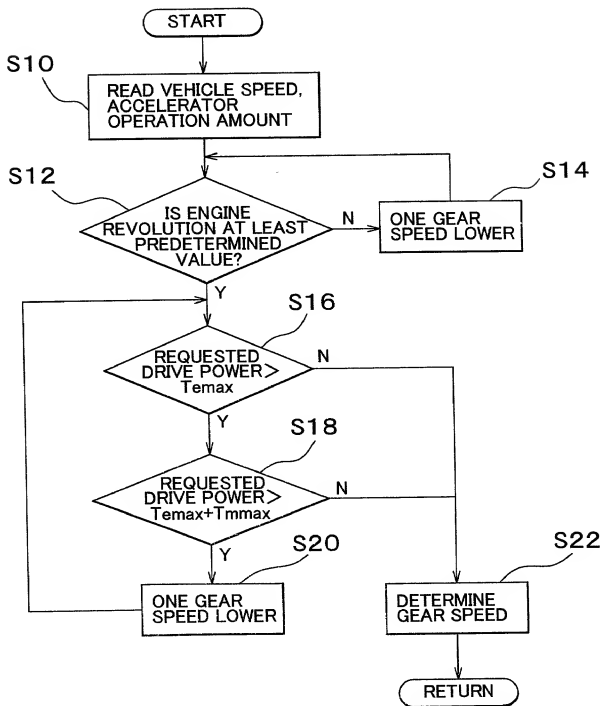


FIG. 3


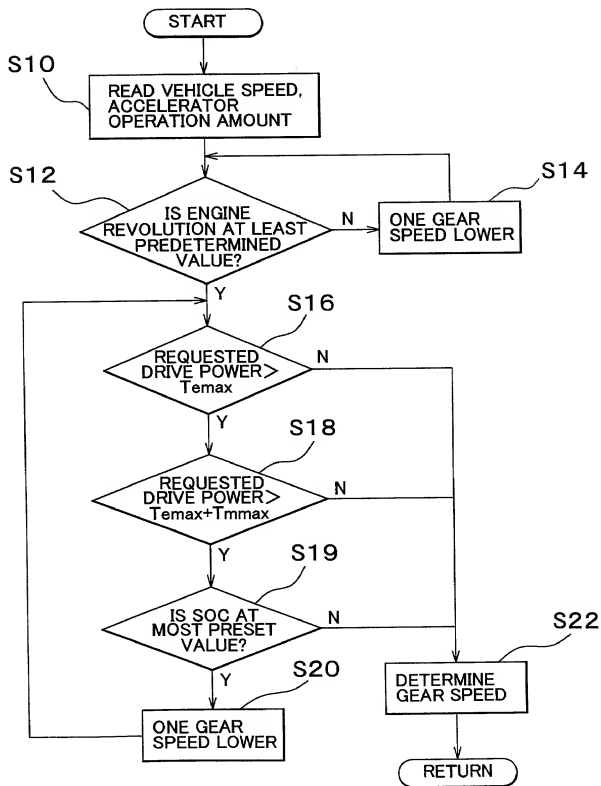


FIG. 4

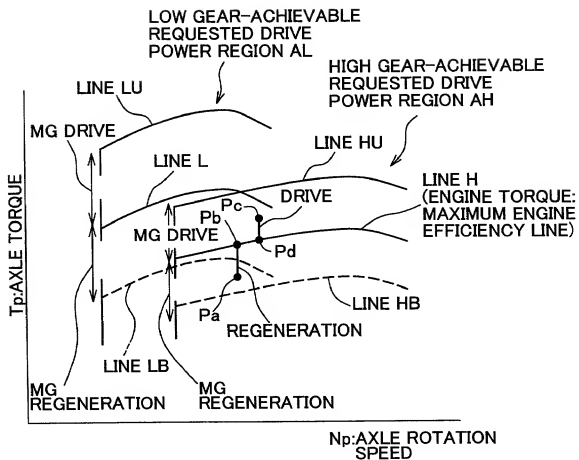


P_a : REQUESTED DRIVE POWER 1

P_b : ENGINE OPERATION REGION IS OPTIMIZED BY MG REGENERATION

P_c : REQUESTED DRIVE POWER 2

P_d : ENGINE OPERATION REGION IS OPTIMIZED BY MG DRIVE

FIG. 5

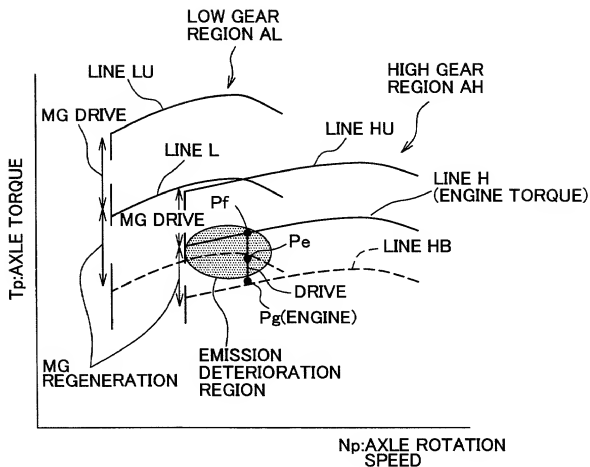

P_e : REQUESTED DRIVE POWER

P_g : ENGINE OPERATION REGION IS OPTIMIZED BY MG DRIVE

09694021.102300

FIG. 6





FIG. 7

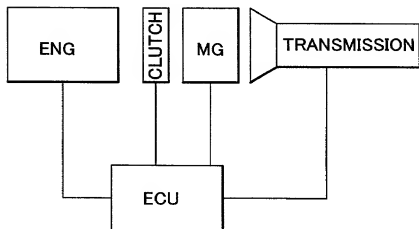

APPLICATION FOR UNITED STATES PATENT DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:
CONTROL APPARATUS FOR TRANSMISSION-EQUIPPED HYBRID VEHICLE, AND CONTROL METHOD FOR THE SAME
described and claimed in the specification:

Check one

*a. ☒ attached hereto.

b. ☐ filed on _____ as Application No. _____ and amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

Under Title 35, U.S. Code §119, the priority benefits of the following foreign application(s) and/or United States provisional application(s) filed within one year prior to this application are hereby claimed:

Japanese Patent Application No.: HEI 11-329078 filed November 19, 1999

The following application(s) for patent or inventor's certificate on this invention were filed in countries foreign to the United States of America either (a) more than one year prior to this application, or (b) before the filing date of the above-named foreign priority application(s) and/or United States provisional application(s):

I hereby appoint the following as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent Office:

James A. Oliff, Reg. No. 27,075; William P. Berridge, Reg. No. 30,024;

Kirk M. Hudson, Reg. No. 27,562; Thomas J. Pardini, Reg. No. 30,411;

Edward P. Walker, Reg. No. 31,450; Robert A. Miller, Reg. No. 32,771;

Mario A. Costantino, Reg. No. 33,565; and Caroline D. Dennison, Reg. No. 34,494.

ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO OLIFF & BERRIDGE, PLC, P.O. BOX 19928, ALEXANDRIA, VIRGINIA 22320, TELEPHONE (703) 836-6400.

I hereby declare that I have reviewed and understand the contents of this Declaration, and that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

1 **Typewritten Full Name
of First or Sole Inventor**

2 ****Inventor's Signature:**

3 ****Date of Signature:**

	<u>Toshifumi</u>	<u>Takaoka</u>
	Given Name	Middle Initial
	<u>Toshifumi</u>	<u>Takaoka</u>
	Family Name	
	<u>October 9, 2000</u>	
	Month	Day
Residence:	<u>Susono-shi</u>	<u>Shizuoka-ken</u>
	City	State or Province
Citizenship:	<u>Japan</u>	<u>Japan</u>
	Country	
	Post Office Address:	
	(Insert complete mailing address, including country)	
	<u>c/o TOYOTA JIDOSHA KABUSHIKI KAISHA</u>	
	<u>1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 Japan</u>	

*If Box (a.) is checked, this form may be executed only when attached to the specification (including claims).

**Note to Inventor: Please sign name exactly as it appears above and insert actual date of signing.

IF THERE IS MORE THAN ONE INVENTOR USE PAGE 2 AND PLACE AN "X" HERE ☒

PAGE 2 OF U.S.A. DECLARATION FORM
(Discard this page in a sole inventor application)

1 **Typewritten Full Name**
of Second Joint Inventor (if any)

	Naoto	Suzuki
	Given Name	Family Name
2 **Inventor's Signature:	<i>Naoto</i>	<i>Suzuki</i>
3 **Date of Signature:	—	—
	October 9, 2000	—
	Month	Day
	Year	—
Residence:	Fuji-shi	Shizuoka-ken
	City	State or Province
	Japan	Country
Citizenship:	Japan	
	Post Office Address:	
	(Insert complete mailing address, including country)	
	c/o TOYOTA JIDOSHA KABUSHIKI KAISHA	
	1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 Japan	

1 **Typewritten Full Name**
of Third Joint Inventor (if any)

	Takashi	Suzuki
	Given Name	Family Name
2 **Inventor's Signature:	<i>Takashi</i>	<i>Suzuki</i>
3 **Date of Signature:	—	—
	October 9, 2000	—
	Month	Day
	Year	—
Residence:	Susono-shi	Shizuoka-ken
	City	State or Province
	Japan	Country
Citizenship:	Japan	
	Post Office Address:	
	(Insert complete mailing address, including country)	
	c/o TOYOTA JIDOSHA KABUSHIKI KAISHA	
	1, Toyota-cho, Toyota-shi, Aichi-ken, 471-8571 Japan	

1 **Typewritten Full Name**
of Fourth Joint Inventor (if any)

	Daimon	Okada
	Given Name	Family Name
2 **Inventor's Signature:	<i>Daimon</i>	<i>Okada</i>
3 **Date of Signature:	—	—
	October 9, 2000	—
	Month	Day
	Year	—
Residence:	Ikeda-shi	Osaka-hu
	City	State or Province
	Japan	Country
Citizenship:	Japan	
	Post Office Address:	
	(Insert complete mailing address, including country)	
	c/o DAIHATSU MOTOR CO., LTD.	
	1-1, Daihatsu-cho, Ikeda-shi, OSAKA, JAPAN	

1 **Typewritten Full Name**
of Fifth Joint Inventor (if any)

	Given Name	Family Name
2 **Inventor's Signature:		
3 **Date of Signature:	—	—
	—	—
	Month	Day
	Year	—
Residence:		
	City	State or Province
		Country
Citizenship:		
	Post Office Address:	
	(Insert complete mailing address, including country)	

****Note to Inventors:** Please sign name exactly as it appears and insert the actual date of signing.
 This form may be executed only when attached to the first page of the Declaration and Power of Attorney form of the application to which it pertains.